

PURIST®

Features


- · Smooth soft touch actuator
- Plumbing can be installed through wall or floor
- Vitreous china
- One-piece
- Less supply
- Elongated bowl
- Comfort Height™
- Power Lite™ system (see electrical service requirements)
- Includes Quiet-Close™ seat and cover
- 16-5/8" (42.2 cm) high bowl with seat
- 12" (30.5 cm) rough-in
- 1.6 gpf (6 lpf)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2
- Energy Policy Act of 1992 (EPACT)
- Underwriter's Laboratories (UL)

HATBOX ™ TOILET K-3492



Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

• NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-3492	Elongated bowl toilet	□ 0 White	□ Other	

Product Specification:

Toilet shall have a smooth soft touch actuator. Plumbing may be installed through the wall or floor. Toilet shall be 1.6 gpf (6 lpf), with Power Lite™ flushing system. Toilet shall have a 12″ (30.5 cm) rough-in. Toilet shall be made of vitreous china. Toilet shall be one piece and have an elongated bowl. Toilet shall include Quiet-Close™ seat and cover. Toilet shall be Comfort Height™. Bowl shall be 16-5/8″ (42.2 cm) high with seat. Toilet shall be less supply. Toilet shall be Kohler Model K-3492-_____.

$\text{PURIST}_{\text{\tiny \tiny{!}}}$

Technical Information


Fixture:							
Configuration				1-piece, compact elongated			
Water per flush		1.6 gallons (6 L)					
Passageway				2-1/8" (5.4 cm)			
Water area				12" (30.5 cm) x 9-1/2" (24.1 cm)			
Water depth from rim			4-7/8" (12.4 cm)				
Included Components:							
Seat	1022679						
Pump	HP	V	AC	Hz	А		
	1/5	1:	20	60	8.5		

Required Electrical Service

Dedicated circuit required, Ground-Fault Circuit-Intern	•
Receptacle	120 VAC, 15 A, 60 Hz

Installation Notes

Install this product according to the installation guide.

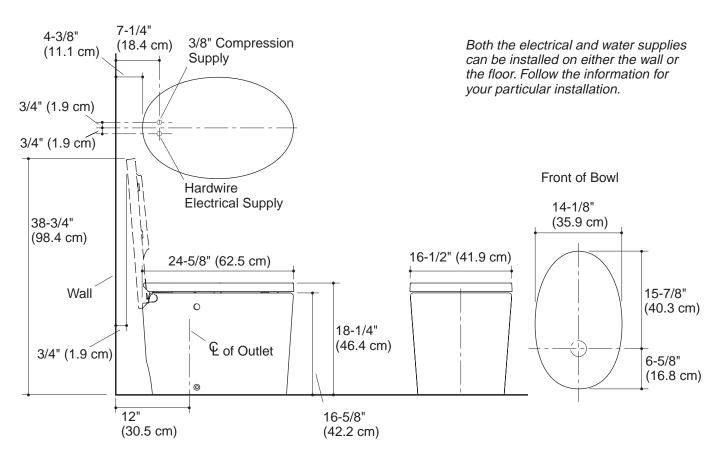

Product Diagram

