

# **FALLING WATER**

#### **Features**


- Brass construction
- Wall-mount installation
- Lever handle
- Single-handle control
- 2.2 gallon (8.33 liter) per minute flow rate
- Available with 7-1/4" (18.4 cm), 10-1/4" (26 cm), or 13-1/4" (33.7 cm) length spout

### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ADA
- ASME A112.18.1
- CSA B125
- IAPMO/UPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)

WALL-MOUNT FAUCET
K-T195
ALSO K-T197, K-T199



**ADA** 

### Colors/Finishes

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

## **Specified Model**

Model	Description	Colors/F	Colors/Finishes			
K-T195	7-1/4" (18.4 cm) length spout	□ CP □	☐ PB ☐ Other			
K-T197	10-1/4" (26 cm) length, 3/4" OD spout	□ CP □	☐ PB ☐ Other			
K-T199	13-1/4" (33.7 cm) length spout	□ CP □	□ PB □ Other			
Required Accessory						
K-307-K	Wall-mount valve		□ NA			

Optional Accessories							
K-7702	Pop-up lavatory drain	□ CP	□ PB				
K-7710	Lavatory drain	□ CP					
K-7715	Lavatory drain	□ CP	□ PB				
K-8801	Duostrainer <sub>®</sub> sink strainer	□ CP	□ PB	□ Other			

### **Product Specification**

Wall-mount faucet shall be of brass construction. Product shall be available with 7-1/4" (18.4 cm), 10-1/4" (26 cm), or 13-1/4" (33.7 cm) length spout. Product shall have a 2.2 gallon (8.33 liter) per minute flow rate. Product shall be single-control with lever handle. Product shall be K-T\_\_\_\_\_\_.

USA: 1-800-4-KOHLER Canada: 1-800-964-5590 kohler.com


# **FALLING WATER**

#### **Installation Notes**

Install this product according to the installation guide.

Install the wall-mount valve according to the valve installation quide.

A total of two 1-7/8" D. cut-out holes are required, one for the spout and one for the handle.

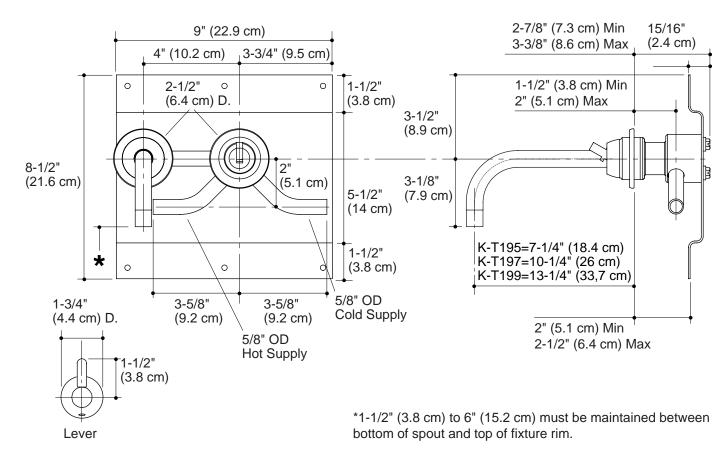

**Product Diagram** 

